

conecto Cs



Cs is a cover profile with EPDM-membrane fitted in a joint rim with a dedicated adhesive.

Profile is designed for parking lots and inside usage. It conveys the vehicle traffic efficiently.


Can be also use on walls.

The profiles particularly suit applications where affordable solutions are required and where there are no upright deformations induced by slab curling.

One-sided fitting requires that dedicated concrete bolts be applied, which are included in the delivery.

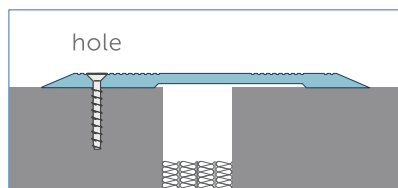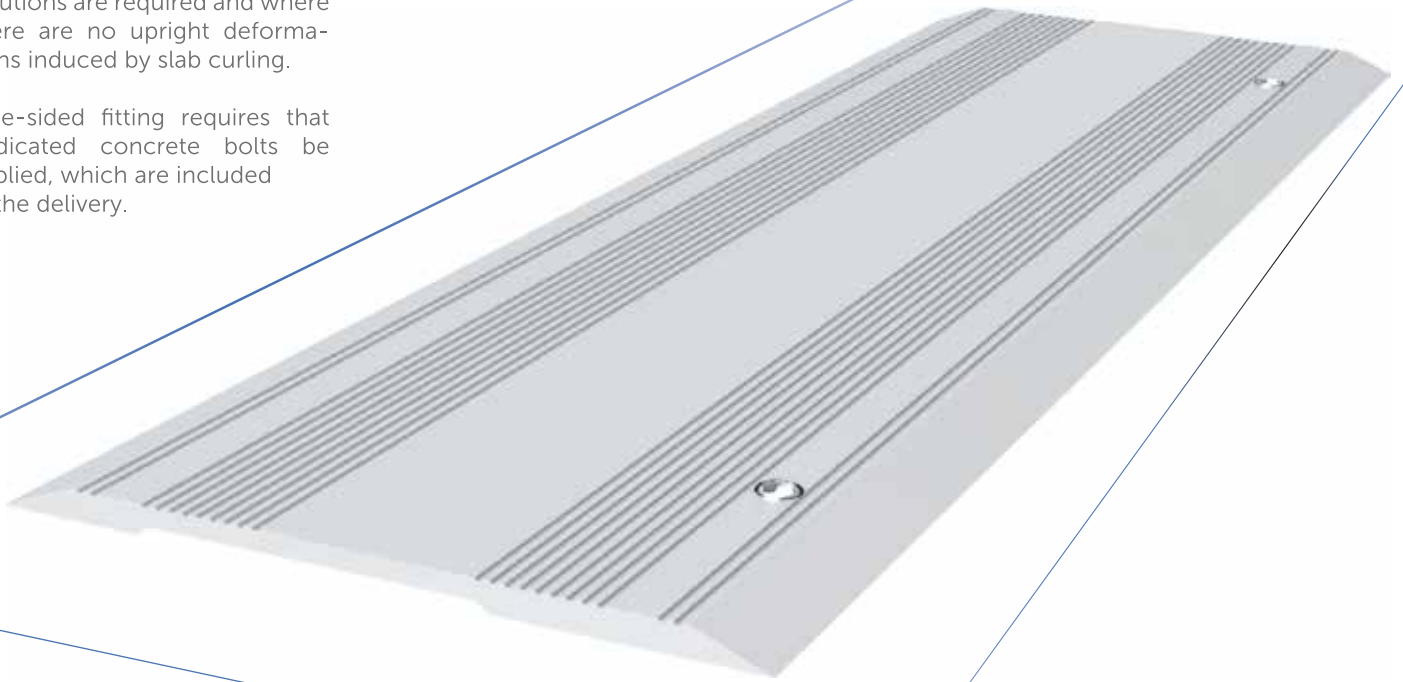

CS one side holes

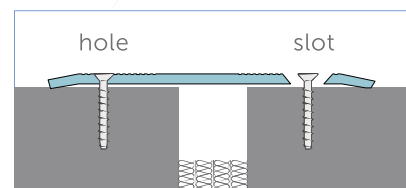

CS bilateral holes

Conecto Cs	Visible element (mm)	Gap width (mm)	Installation height (mm)	Material type	Max load (KN)	Horizontal compensation (mm)
CS 120	120	max 50	5	natural aluminum	60	±40
CS 160	160	max 90	7	natural aluminum	60	±70
CS 260	260	max 150	7	natural aluminum	60	±80